

Improved Quantum Cost for n -bit Toffoli Gates

Dmitri Maslov and Gerhard W. Dueck
 Faculty of Computer Science
 University of New Brunswick
 Fredericton, NB, E3B 5A3, Canada
 dmitri.maslov@unb.ca, gdueck@unb.ca

Abstract

We present an n -bit Toffoli gate quantum circuit based on the realization proposed by Barenco *et al.*, where some of the Toffoli gates in their construction are replaced with Peres gates. This results in a significant cost reduction. Our main contribution is a quantum circuit which simulates the $(m+1)$ -bit Toffoli gate with $32m - 96$ elementary quantum gates and one garbage bit which is passed unchanged. This paper is a corrected and expanded version of [2].

1 Toffoli gate cost

Toffoli gates are important building blocks in reversible and quantum circuits. In fact, a large number of reversible logic synthesis methods use n -bit Toffoli gates (for example, [5, 3]). The n -bit Toffoli gates are mentioned in classical quantum circuits books (such as [6]) as well as in journal publications [1]. The main reason for popularity of n -bit Toffoli gates over the other gates is their completeness and relative simplicity in using them. The high demand in n -bit Toffoli gate makes it important to have a low cost quantum circuit for this gate.

Barenco *et al.* [1] considered all one qubit gates and all controlled-V gates [6] to be elementary. The authors proposed a circuit for the $(m+1)$ -bit Toffoli gate with a cost of $48m - 116$ basic operations plus one garbage bit. Here are their two main results (slightly reformulated to fit the notations of this paper).

Lemma 7.2. If number of bits in the circuit $n \geq 5$ and $m \in \{3, \dots, \lfloor n/2 \rfloor\}$, then an $(m+1)$ -bit Toffoli gate can be simulated by a network consisting of $4(m-2)$ Toffoli gates.

Corollary 7.4. On an n -bit network (where $n \geq 7$), an $(n-1)$ -bit Toffoli gate can be simulated by $8(n-5)$ Toffoli gates, as well as by $48n - 212 (= 48(n-2) - 116)$ basic operations.

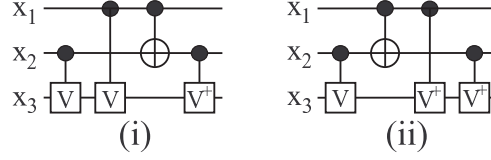


Figure 1: Structure of the Peres gate and its inverse

Before we can describe our improved design, we have to introduce the Peres gate. The Peres gate $P(x_1, x_2, x_3)$ [7, 8] is equivalent to the transformation produced by a Toffoli gate $TOF(x_1, x_2, x_3)$ followed by a CNOT gate $TOF(x_1, x_2)$. A four elementary quantum transformations realization of Peres gate is illustrated in Figure 1(i), where $\mathbf{V} = \frac{i+1}{2} \begin{pmatrix} 1 & -i \\ -i & 1 \end{pmatrix}$ and $\mathbf{V}^+$ is its inverse. Denote the four gates used in the proposed construction as A, B, C and D . Trivial analysis shows that the inverse Peres gate can be achieved by a circuit $D^{-1}C^{-1}B^{-1}A^{-1}$ (Figure 1(ii)), consisting of the inverses of the gates used for construction of Peres gate. From the point of view of Toffoli-CNOT realization, the inverse Peres gate will act as a CNOT $TOF(x_1, x_2)$ followed by the Toffoli gate $TOF(x_1, x_2, x_3)$.

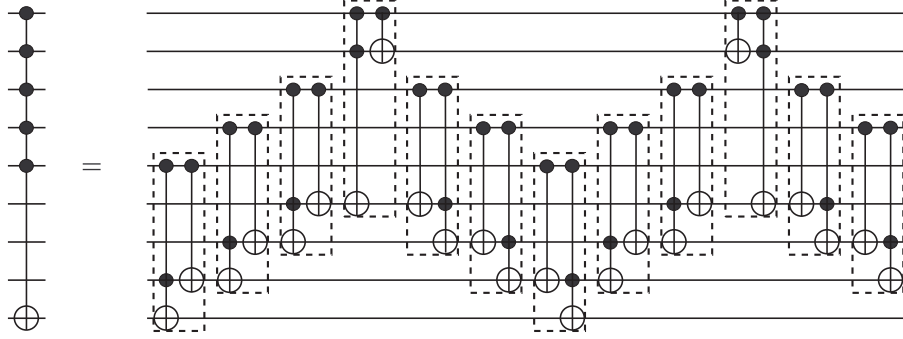


Figure 2: Circuit for $(m+1)$ -bit Toffoli (illustrated for $m=5$)

We suggest that in construction of Lemma 7.2 in [1] the Peres gate or its inverse are used everywhere instead of the more expensive Toffoli gate. This is illustrated in Figure 2, where each of the pairs Toffoli-CNOT and CNOT-Toffoli is a Peres gate or its inverse.

To prove that such circuit realizes an $(m+1)$ -bit Toffoli one can inspect it or simply notice that a pair of identical CNOTs can be moved together using the moving rule from [4] and thus, be canceled out. Therefore, this circuit

becomes equivalent to the one proposed by Barenco *et al.* [1] which was shown to simulate a Toffoli gate. With the Peres gates the network for $(m + 1)$ -bit Toffoli gate will have a cost of $4*(4m - 10) + 4*2 = 16m - 32$ elementary quantum operations plus $(m - 2)$ garbage bits. Using our construction in Corollary 7.4 of [1] one can achieve a cost of $32m - 96$ elementary operations plus one garbage bit for $(m + 1)$ -bit Toffoli gate construction for $m \geq 5$, which is better than the calculated in [1] $48m - 116$ elementary operations plus one garbage bit.

Further, we propose to use the Peres gate in all similar constructions (for example, the circuit on page 184 of [6]) for a better quantum cost analysis.

2 Usefulness of the results

Barenco *et al.* [1] among other results provide the following Lemma (slightly reformulated to fit the context of the presented paper).

Lemma 7.1. For any $m \geq 2$, $(m + 1)$ -bit Toffoli gate can be simulated with $2^{m+1} - 3$ controlled-V quantum operations.

Since for small numbers m $2^{m+1} - 3$ can be less than $16m - 32$ or $32m - 96$ achieved here (and less than $4(m - 2)T$, where T is the cost of the original Toffoli gate), we would like to illustrate where the new results improve the known ones. Table 1 summarizes usefulness and applicability of the design that uses the Peres gate; symbol “*” indicates when the result was achieved using the proposed construction. It is interesting to notice that the proposed construction which uses Peres gates in Lemma 7.2 of [1] first worked to decrease quantum cost of size 6 Toffoli gate, even though the construction is valid for smaller Toffoli gates. The first time formula $32m - 96$ updated the known cost estimates is for the size 10 Toffoli gate quantum cost.

References

- [1] A. Barenco, C. H. Bennett, R. Cleve, D. P. DiVincenzo, N. Margolus, P. Shor, T. Sleator, J. A. Smolin, and H. Weinfurter. Elementary gates for quantum computation. *The American Physical Society*, 52:3457–3467, 1995.
- [2] D. Maslov and G. Dueck. Improved quantum cost for n -bit Toffoli gates. *IEE Electronics Letters*, 39(25):1790–1791, December 2003.

Toffoli gate size ($m + 1$)	Garbage	Cost
1	0	1
2	0	1
3	0	5
4	0	13
5	0	29
6	0	61
6	1	52
6	3	48*
7	0	125
7	1	84
7	4	64*
8	0	253
8	1	116
8	5	80*
9	0	509
9	1	154*
9	6	96*
10	0	1021
10	1	192*
10	7	112*
$(m + 1) > 10$	0	$2^{m+1} - 3$
$(m + 1) > 10$	1	$32m - 96^*$
$(m + 1) > 10$	$m - 2$	$16m - 32^*$

Table 1: Quantum costs of the Toffoli gates with m controls

- [3] D. Maslov, G. Dueck, and M. Miller. Fredkin/Toffoli templates for reversible logic synthesis. In *International Conference on Computer Aided Design*, November 2003.
- [4] D. Maslov, G. Dueck, and M. Miller. Templates for Toffoli network synthesis. In *International Workshop on Logic Synthesis*, pages 320–326, Laguna Beach, CA, 2003.
- [5] D. M. Miller, D. Maslov, and G. W. Dueck. A transformation based algorithm for reversible logic synthesis. In *Proceedings of the Design Automation Conference*, pages 318–323, June 2003.

- [6] M. Nielsen and I. Chuang. *Quantum Computation and Quantum Information*. Cambridge University Press, 2000.
- [7] A. Peres. Reversible logic and quantum computers. *Physical Review A*, 32:3266–3276, 1985.
- [8] M. Perkowski, M. Lukac, M. Pivtoraiko, P. Kerntopf, M. Folgheraiter, D. Lee, H. Kim, W. Hwangbo, J.-W. Kim, and Y. W. Choi. A hierarchical approach to computer-aided design of quantum circuits. In *6th International Symposium on Representations and Methodology of Future Computing Technologies*, pages 201–209, March 2003.